

CDMA-07

Features:

Specially Designed for CDMA Repeater
Confirm to ITU Technical Standards
High Rejection
Compact Size

Applications:

CDMA Repeater, Line Amplifier

**Technical Specifications:**

Frequency Range: 825 to 835MHz
870 to 880MHz
Insertion Loss: 1.5dB maximum
1.2dB typical
Passband Ripple: 0.5dB p-p maximum
Return Loss: 18dB minimum
Stopband Attenuation:
≥8dB @ $f_0 \pm 7.5\text{MHz}$
≥90dB @ Channel Isolation

Power: 10 watts

Operating Temperature: -30 to +75 °C

Storage Temperature: -40 to +85 °C

Operating Humidity: 0 to 90%, relative

Dimension : 120×91×56mm


Connectors: SMA/N

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.

Outline Drawing:

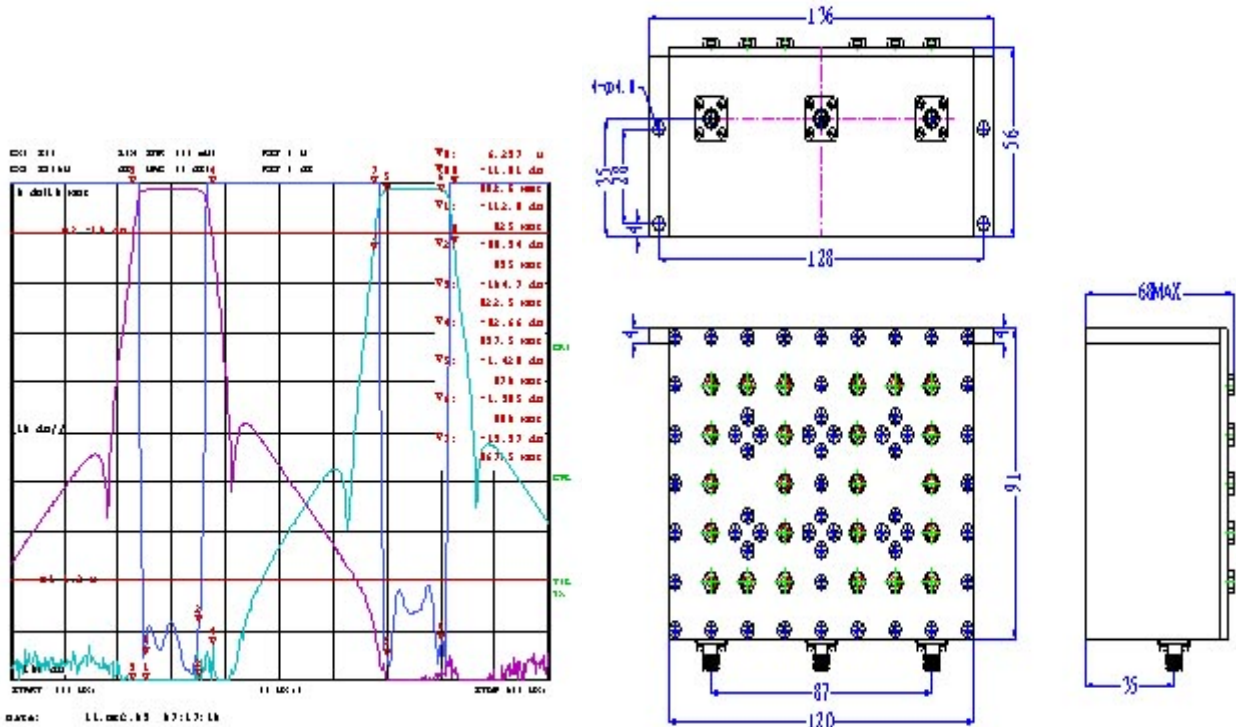

Notes:
Connector type is optional of N-type or SMA, according to requirements.

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.