



FTF3-02 RFI FILTER

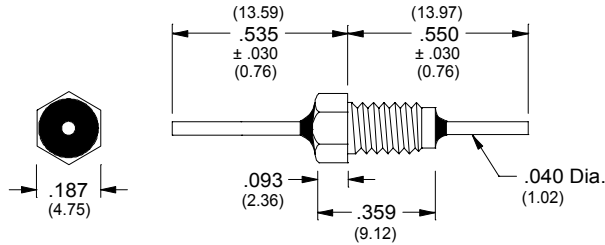


8-32 UNC-2A THREAD
(X.XX) = MILLIMETERS



Capacitance: 1500 pF Min.
Dissipation Factor: 5% Max.
Working Volts DC: 200*
Dielectric Withstanding Voltage: 500 VDC, 2 Seconds
Insulation Resistance @ 25°C : 10 GΩ Min.
Max. Current: 10 Amps DC
DC Resistance: .01Ω Max.
Operating Temperature: -55°C - +125 °C
Recommend Mounting Torque: 4-6 Inch/Lbs.
Insertion Loss:

10 MHz	5 dB
100 MHz	42 dB
1Ghz	70 dB

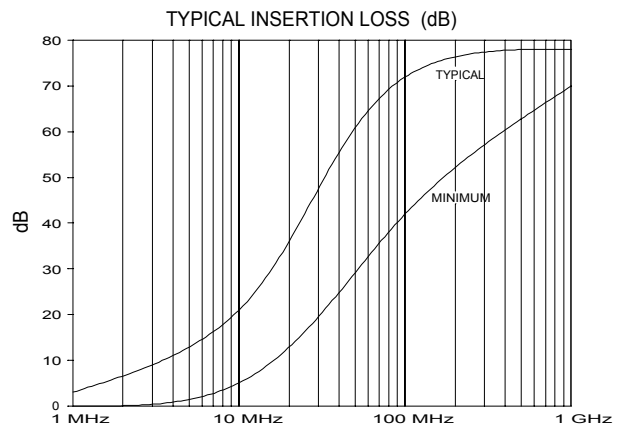

Materials:

Case: Silver Plated Per QQ-S-365A
Lead: Silver Plated Per QQ-S-365A
Epoxy Sealed, Both Ends

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.