


### S10-01-XXXX STANDOFF CAPACITOR

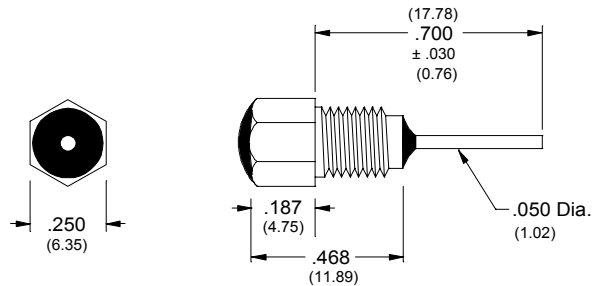

12-32 UNEF-2A THREAD

(X.XX) = MILLIMETERS

**Materials:**

Case: Silver Plated Per QQ-S-365A  
 Lead: Silver Plated Per QQ-S-365A  
 Epoxy Sealed, Both Ends

Insulation Resistance @ 25 °C: 10 GΩ Min.  
 Dissipation Factor: .035 Max.  
 Operating Temperature: -55 °C - +125 °C  
 Recommended Mounting Torque: 8 Inch/Lbs Max.

PART NUMBER	CAPACITANCE	TOLERANCE	WVDC	DWV
S10-01-252P	2500 pF	-0% +100%	500	1000

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407  
 (814) 664-7728 Fax (814) 664-4582 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.