


### **Lumped Element Circulators**

PART NUMBER	FREQ. RANGE ( GHz )	BANDWIDTH ( % )	IL (dB)	ISO (dB)	VSWR	Power (W)	DIMENSIONS (mm)				PACKAGE
							A	B	C	D	
CMIHL101	0.05 ~ 0.1	5 ~ 15	0.8	18	1.3	10					FIG.5
CMIHL102	0.1 ~ 0.9	20	0.6	20	1.25	30					FIG.6
CMIHL103	0.12 ~ 0.2	5 ~ 15	0.5	20	1.25	1200	250	130			FIG.2
CMIHL104	0.15 ~ 0.9	5	0.4	22	1.20	50					FIG.1
CMIHL105	0.15 ~ 0.9	10 ~ 20	0.6	20	1.25	10					FIG.1
CMIHL106	0.2 ~ 1.0	30 ~ 50	1.0	18	1.35	10					FIG.4
CMIHL107	0.2 ~ 0.4	5 ~ 15	0.5	20	1.25	1200	190	65			FIG.2
CMIHL108	0.36 ~ 0.7	15 ~ 20	0.6	20	1.3	300					FIG.3
CMIHL109	0.4 ~ 0.9	5 ~ 15	0.5	20	1.25	1200	120	40			FIG.2

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**  
**(814) 664-7728 Fax (814) 664-4582 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.

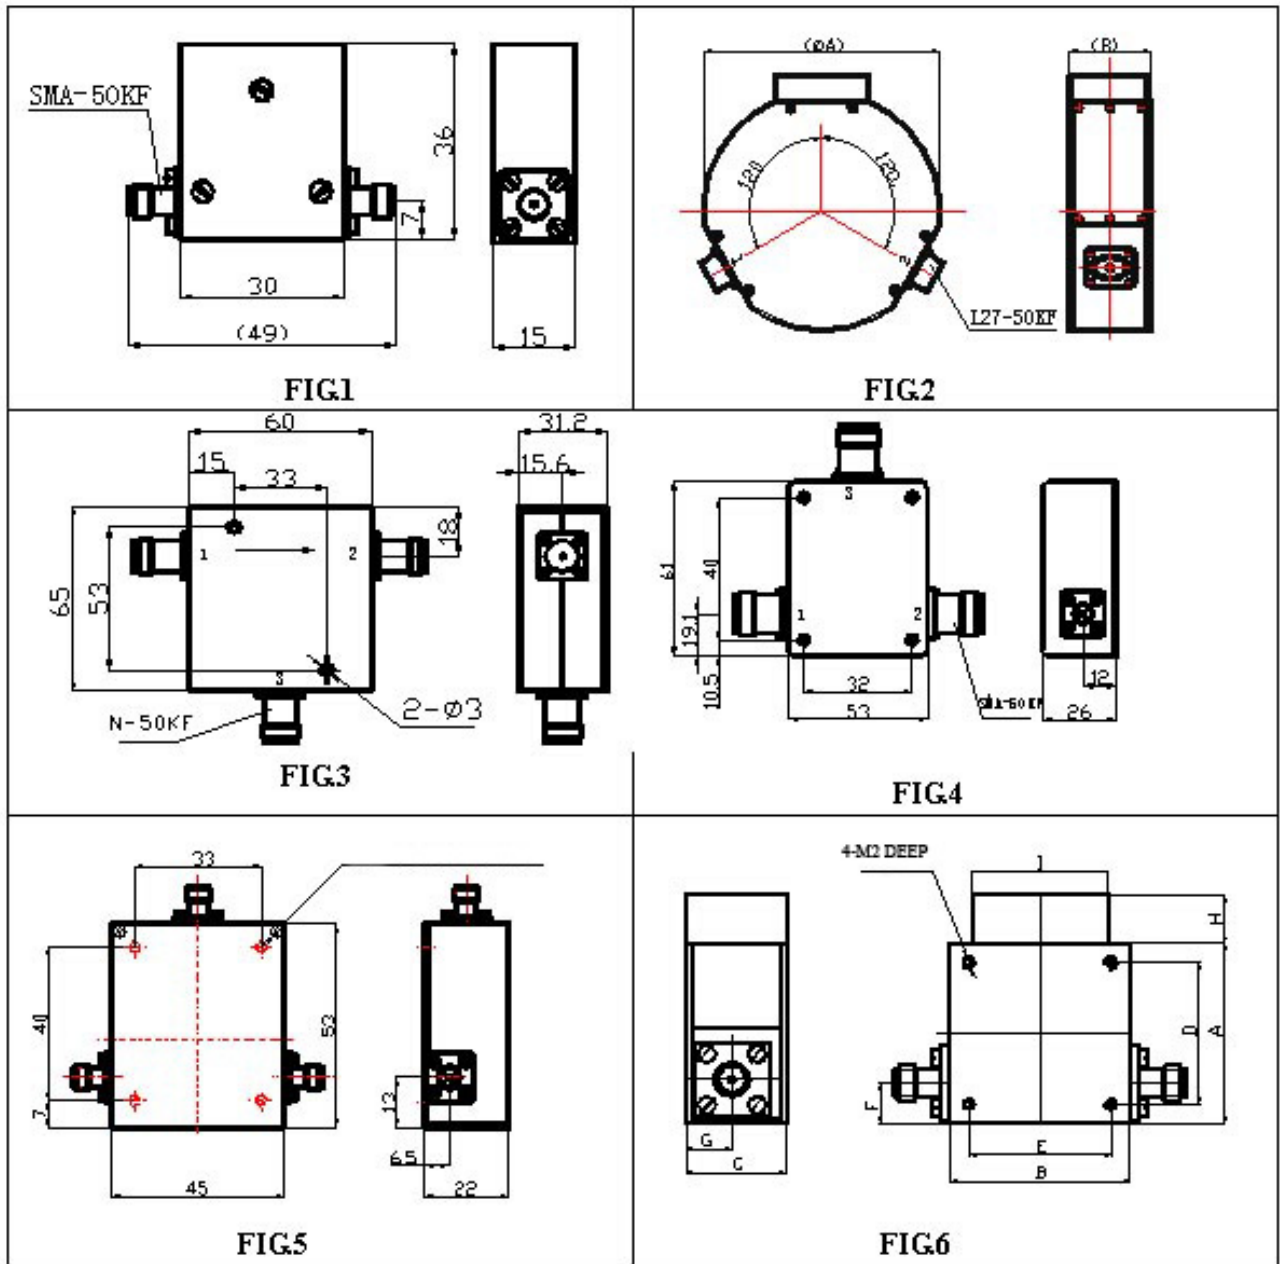

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407  
(814) 664-7728 Fax (814) 664-4582 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.